


# GREATMATS

## Sterling Rubber Roof Top Tile 2 inch Technical Specifications Sterling Tile 2 inch Cross-section

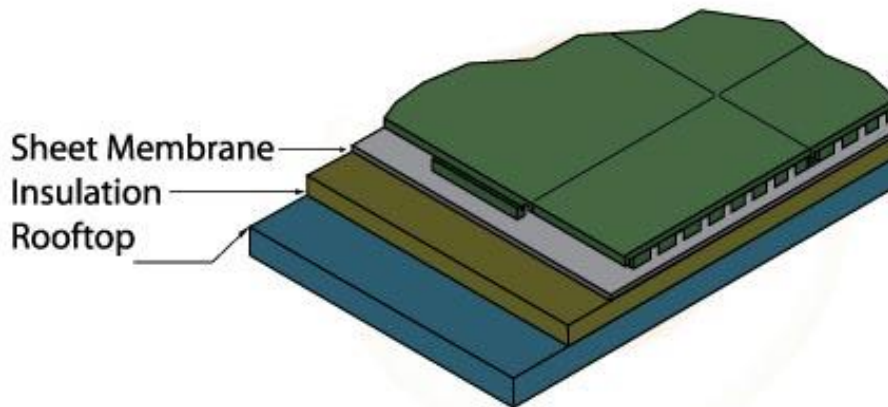

PHYSICAL PROPERTIES				
Test Description	ASTMRef.	Results	Test Lab	Test Date
Freeze Thaw	C67	No deterioration	SGS	12/98
Rubber Deterioration/Air Oven	D573	No deterioration	SGS	12/98
Slip Resistance	E303	Dry 102 Wet 62	SGS	9/98
Slip Resistance	D2047	Dry .81 Wet .82	SGS	2/99
Compression Deflection	D1667	29.5 PSI to 25% Compression	NWI	1/95
Compression Set	D395	4.37% Permanent Set	NWL	1/95
Tensile Strength	D412	107 PSI	SGS	2/99
Elongation at Break	D412	165%	SGS	2/99
Tear Strength	D624	33.1 Lbs/Inch	SGS	2/99
Wear Surface Density (Durability)	>60 lbs/CuFt			
Flammability- Burning Pill Test	D2859	Pass	NWL	1/95
Flammability- Roof Covering	E108	Class A(Premium)	FMR	2/99

Manufactured to be 24x24 inches with a tolerance of + 1 / 8 inch due to heat related expansion and contraction of rubber products

PACKAGING INFORMATION
90 Pcs per pallet
Pallet weight: 2250
Pallet height including pallets: 36"

WARRANTY INFORMATION
Limited Lifetime Warranty

Greatmats.com  
117 Industrial Ave  
Milltown, WI 54858

877-822-6622  
info@greatmats.com  
revised 5/2022